



EDEA LIGHT

BROCHURE

LIGHTING SOLUTIONS

ALL AROUND THE WORLD



www.edealight.com





Road and street luminaires are used for highway, street and street lighting. It has a strong body that is resistant to weather conditions and crushing, and it has good cooling with heat conduction.

Street lighting fixtures resolve different needs with lens types at different angles.

Technical Details

Item	Power(W)	Description	Number of LED	Light Output (Lm)	Dimensions (mm)
DLTG-AE1	60	Delta Gear AE1	24	8200	630-280-77
DLTG-AE2	80	Delta Gear AE2	36	11000	630-280-77
DLTG-AE3	100	Delta Gear AE3	48	13800	630-280-77
DLTG-AE4	120	Delta Gear AE4	60	16500	630-280-77
DLTG-AE5	140	Delta Gear AE5	60	19300	630-280-77

Technical Features

Warranty	: 6 Years
Lamp Type	: Power LED
Housing	: Aluminium
Glass	: 5mm Tempered
Optics	: Lens
IP	: 66
Kelvin	: 2200 - 3000 - 4000 - 5000 - 6000
CRI	: > 80
Led Lifetime	: 75.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -30°C / +75°C

Quality Certificate



RoHS

ISO

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapi No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadimkoy-Arnautkoy/ İstanbul / Turkey



Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Road and street luminaires are used for highway, street and street lighting. It has a strong body that is resistant to weather conditions and crushing, and it has good cooling with heat conduction.

Street lighting fixtures resolve different needs with lens types at different angles.

Technical Details

Item	Power(W)	Description	Number of LED	Light Output (Lm)	Dimensions (mm)
DLTG1	60	Delta Gear 1	24	7200	517-219-53
DLTG2	80	Delta Gear 2	36	9600	517-219-53
DLTG3	100	Delta Gear 3	48	12000	517-219-53
DLTG4	120	Delta Gear 4	60	14400	517-219-53
DLTG5	140	Delta Gear 5	60	16800	517-219-53

Technical Features

Warranty	: 5 Years
Lamp Type	: Power LED
Housing	: Aluminium
Glass	: 5mm Tempered
Optics	: Lens
IP	: 65
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



RoHS

ISO

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapi No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadimkoy-Arnautkoy/ İstanbul / Turkey




www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Road and street luminaires are used for highway, street and street lighting. It has a strong body that is resistant to weather conditions and crushing, and it has good cooling with heat conduction.

Street lighting fixtures resolve different needs with lens types at different angles.

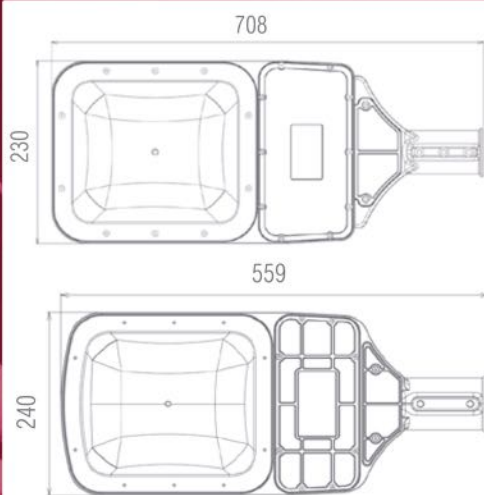

Technical Details

Item	Power(W)	Description	Number of LED	Light Output (Lm)	Dimensions (mm)
RSSG1	30	Spec Rim Gear 1	24	3150	560-240-100
RSSG2	50	Spec Rim Gear 2	24	6150	560-240-100
RSSG3	60	Spec Rim Gear 3	24	7150	560-240-100
RSSG4	75	Spec Rim Gear 4	24	8650	560-240-100
RSSG5	90	Spec Rim Gear 5	24	10150	560-240-100
RSSG6	100	Spec Rim Gear 6	24	11150	560-240-100

Item	Power(W)	Description	Number of LED	Light Output (Lm)	Dimensions (mm)
DSSG1	120	Spec Dau Gear 1	48	13150	708-230-100
DSSG2	140	Spec Dau Gear 2	48	14840	708-230-100
DSSG3	150	Spec Dau Gear 3	48	16150	708-230-100
DSSG4	185	Spec Dau Gear 4	48	19650	708-230-100
DSSG5	200	Spec Dau Gear 5	48	21150	708-230-100

Technical Features

Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Optics	: Lens
IP	: 66
Kelvin	: 3000-4000-5000-6500
CRI	: < 80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



TSE

RoHS

ISO



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadimkoy-Arnavutkoy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Suns - Rena

Wallwasher Luminaires / Linear Luminaires »

LIGHTING SOLUTIONS



Suitable for surface mounting on somewhere. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.



Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
SWWG1	10	Suns Wallwasher Gear 1	720	250-70-55
SWWG2	20	Suns Wallwasher Gear 2	1520	500-70-55
SWWG3	30	Suns Wallwasher Gear 3	2400	750-70-55
SWWG4	40	Suns Wallwasher Gear 4	3210	1000-70-55
RXV1	8	Rena Linear Gear 1	710	30-42.5-32.5
RXV2	13	Rena Linear Gear 2	1380	30-62.5-52.5
RXV3	16.3	Rena Linear Gear 3	1750	100-112.5-102.5

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Optics	: Diffuser
IP	: 65
Kelvin	: 3000-4000-5000-6500 RGB
CRI	: <80
Led Lifetime	: 40.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapi No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.




Suitable for surface mounting on somewhere. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

Technical Details

Item	Power(W)	Description	Number of LED	Light Output (Lm)	Dimensions (mm)
RFG1	30	Housten Rim Gear 1	24	3150	394-240-100
RFG2	50	Housten Rim Gear 2	24	6150	394-240-100
RFG3	60	Housten Rim Gear 3	24	7150	394-240-100
RFG4	75	Housten Rim Gear 4	24	8650	394-240-100
RFG5	90	Housten Rim Gear 5	24	10150	394-240-100
RFG6	100	Housten Rim Gear 6	24	11150	394-240-100
DFG1	120	Housten Dau Gear 1	48	13150	497-300-100
DFG2	150	Housten Dau Gear 2	48	16150	497-300-100
DFG3	200	Housten Dau Gear 3	60	19650	497-300-100
DFG4	250	Housten Dau Gear 4	60	26500	497-300-100
HFG1	400	Housten Square 1	364	52800	630-280-77
HFG2	500	Housten Square 2	364	66000	630-280-77
HFG3	600	Housten Square 3	364	79200	630-280-77

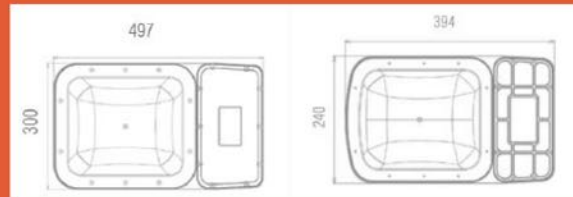

Quality Certificate



TSE

RoHS

ISO

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapi No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.





Suitable for recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.



The Luminaire will be accurate and realistic solution for you.

Technical Features

Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Optics	: Diffuser / Reflector
IP	: 20
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
EDG1	8	Ela 2" Downlight Gear 1	720	Q95-55-Q85
EDG2	10	Ela 3" Downlight Gear 2	500	Q117-55-Q105
EDG3	15	Ela 4" Downlight Gear 3	1034	Q147-55-Q130
EDG4	18	Ela 5" Downlight Gear 4	1417	Q173-60-Q158
EDG5	20	Ela 6" Downlight Gear 5	1822	Q192-65-Q175
EDG6	25	Ela 8" Downlight Gear 6	2410	Q229-65-Q214
GCG1	8	Gate 3" COB Downlight Gear 1	720	Q117-103-Q105
GCG2	12	Gate 4" COB Downlight Gear 2	1080	Q147-120-Q130
GCG3	15	Gate 5" COB Downlight Gear 3	1350	Q173-158-Q158
GCG4	20	Gate 6" COB Downlight Gear 4	1800	Q192-185-Q175
GCG5	30	Gate 8" COB Downlight Gear 5	2700	Q229-185-Q220

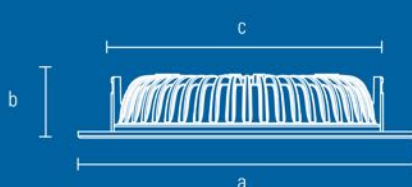

Quality Certificate



www.edealight.com

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Tata Surface

Downlight Luminaire »

LIGHTING SOLUTIONS



Suitable for surfaced mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime. The Luminaire will be accurate and realistic solution for you.

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
TDG1	12	Tata 2" Downlight Gear 1	1080	Q95-120
TDG2	15	Tata 3" Downlight Gear 2	1350	Q117-120
TDG3	20	Tata 4" Downlight Gear 3	1800	Q147-120
TDG4	30	Tata 5" Downlight Gear 4	2700	Q173-120

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Optics	: Difusser
IP	: 20
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

www.edealight.com

Versio Surface

LED Panel Luminaire »

LIGHTING SOLUTIONS



Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.



Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
SPG1	10	Versio Surface Panel Gear 1	1080	300-300-50
SPG2	20	Versio Surface Panel Gear 2	2120	300-600-65
SPG3	33	Versio Surface Panel Gear 3	3795	600-600-65
SPG4	33	Versio Surface Panel Gear 4	3795	300-1200-65

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Difusser
IP	: 20
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Versio Recessed

LED Panel Luminaire »

LIGHTING SOLUTIONS



Suitable for recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.




Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
RPG1	10	Versio Recessed Panel Gear 1	1080	300-300-50
RPG2	20	Versio Recessed Panel Gear 2	2120	300-600-65
RPG3	33	Versio Recessed Panel Gear 3	3795	600-600-65
RPG4	33	Versio Recessed Panel Gear 4	3795	300-1200-65

Technical Features

Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Difusser
IP	: 20
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.


Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey



Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.



Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
REG1	10	Rob Waterproof Gear 1	980	600-90-75
REG2	20	Rob Waterproof Gear 2	1760	600-90-75
REG3	20	Rob Waterproof Gear 3	1760	1200-90-75
REG4	38	Rob Waterproof Gear 4	3250	1200-90-75

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: PC
Glass	: PC
IP	: 65
Kelvin	: 3000-4000-5000-6500
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey




www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

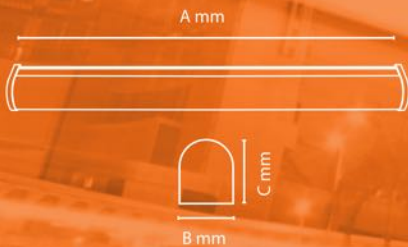

Technical Details

Item	Power(W)	Description	Light Output (lm)	Dimensions (mm)
REGG1	18	Reg Triproof Gear 1	1764	600-90-75
REGG2	38	Reg Triproof Gear 2	3724	1200-90-75
REGG3	60	Reg Triproof Gear 3	5880	1500-90-75

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: AlM
Glass	: PC
IP	: 65
Kelvin	: 3000-4000-5000-6500
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.


Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey




www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

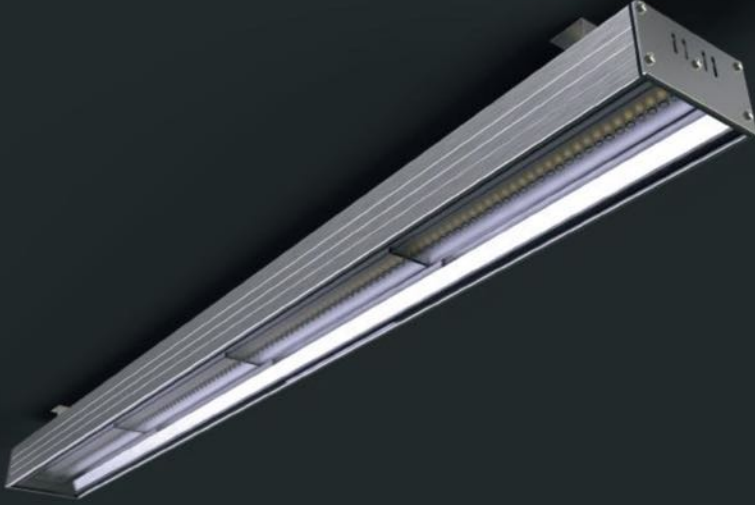

Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.



Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
DEG1	60	Dora Highbay Gear 1	7200	600-125-55
DEG2	75	Dora Highbay Gear 2	8600	900-125-56
DEG3	90	Dora Highbay Gear 3	10250	1200-125-57
DEG4	120	Dora Highbay Gear 4	13400	1200-125-58
DEG5	150	Dora Highbay Gear 5	15320	1500-125-59

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Ironsheet
Glass	: Tempered Glass
IP	: 65
Kelvin	: 3000-4000-6500
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey




www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Corrosion resistant die-cast aluminium body. Only to be used with electronic Led driver. Mains voltage 220-240V / 50-60hz. Clever thermal design. Suitable for illumination up to 8-12 meter height. Dali control option available. Easy mounting possibility

with mounting bracket. Reliable system with L80 B10 lifetime parameters.

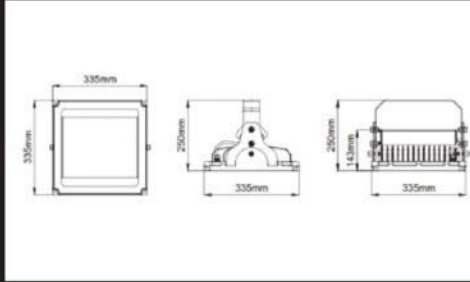

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
AUG1	60	Aura Highbay Gear 1	7320	335-335-100
AUG2	90	Aura Highbay Gear 2	10980	335-335-100
AUG3	120	Aura Highbay Gear 3	14640	335-335-100
AUG4	140	Aura Highbay Gear 4	17080	335-335-100

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Tempered Glass
IP	: 65
Kelvin	: 3000-4000-6500
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate




Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

www.edealight.com

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

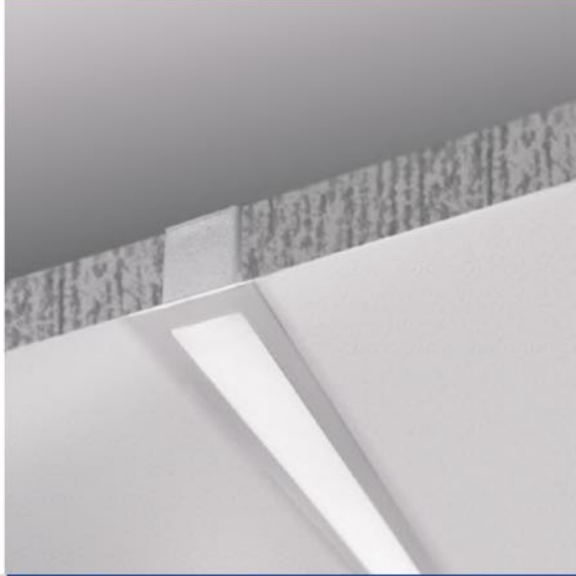


Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
VLG1	13	Vigo Linear Recessed Gear 1	1380	80-85-610
VLG2	19,5	Vigo Linear Recessed Gear 2	1820	80-85-890
VLG3	26	Vigo Linear Recessed Gear 3	2560	80-85-1170

Technical Features

Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Difusser
IP	: 40
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C



Suitable for recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Suitable for suspended or surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.




Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
PLG1	13	Pavo Lineer Surface Gear 1	1380	55-85-300
PLG2	19,5	Pavo Lineer Surface Gear 2	1820	55-85-600
PLG3	26	Pavo Lineer Surface Gear 3	2560	55-85-900

Technical Features

Installation	: Surface / Suspended
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Difusser
IP	: 40
Kelvin	: 3000-4000-6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C



Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com


Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Polen

Wall Luminaire »

LIGHTING SOLUTIONS

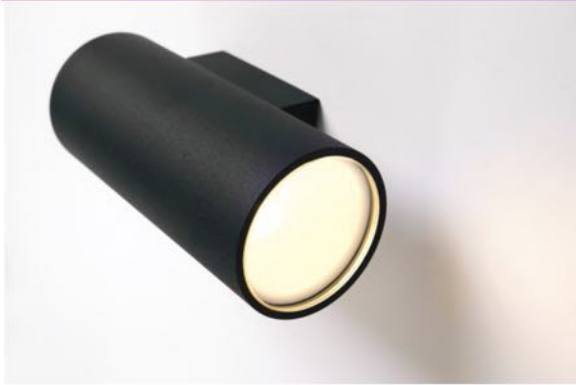

Corrosion resistant die cast aluminium alloy. Thermal shock resistant safety glass. Weatherproof and durable silicone rubber gasket. Ultraviolet stabilized polyester powder coat finish in black, dark, gray and light gray finish. Convenient to be used with

COB led option. Designed for single-side light output. Luminaire can be installed in any burning position.




Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
PWG1	6	Polen Wall Luminaire Gear 1	330	300-173
PWG2	12	Polen Wall Luminaire Gear 2	660	300-173
PWG3	18	Polen Wall Luminaire Gear 3	990	300-173
PWG4	24	Polen Wall Luminaire Gear 4	1520	300-173

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: COB
Housing	: Aluminium
Glass	: Diffuser
IP	: 44
Kelvin	: 3000K-4000K-5000K-6500K
CRI	: >80
Led Lifetime	: 25.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

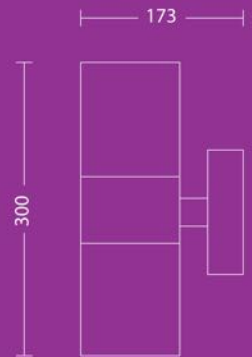

Quality Certificate



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İc Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Ozcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey



Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

www.edealight.com

Bell


Wall Luminaire »

LIGHTING SOLUTIONS



Outdoor on floor luminaire with high protection class. Safe structures through the tempered pressure resistant glasses. Easy applicable luminaires through the inground recessed boxes. Max weight resistance 3000 kg. 316 grade

stainless steel frame. Symmetrical light distribution with 6°, 25° and 55°.

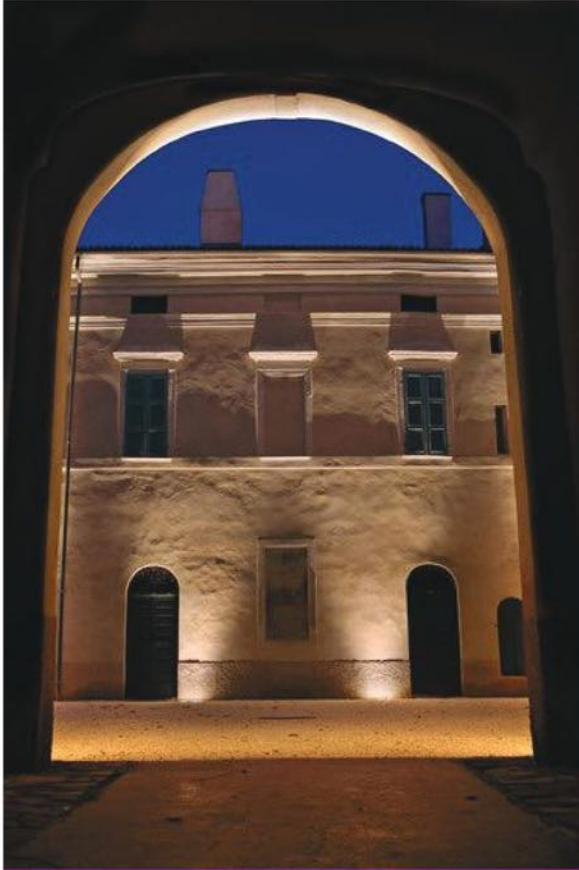


Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
BUG1	3,6	Bell Underwater Gear 1	270	150-110
BUG2	6	Bell Underwater Gear 2	450	150-110
BUG3	9	Bell Underwater Gear 3	675	150-110
BUG4	12	Bell Underwater Gear 4	900	150-110
BUG5	18	Bell Underwater Gear 5	1350	150-110

Technical Features

Installation	: Surface - Recessed
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Steel
Glass	: PC
IP	: 67
Kelvin	: 3000K-4000K-6000K-RGB
CRI	: <80
Led Lifetime	: 30.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate

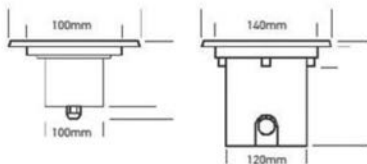

www.edealight.com



Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.



Suitable for recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.




The Luminaire will be accurate and realistic solution for you.

Technical Features

Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: COB LED
Housing	: Aluminium
Optics	: Reflector
IP	: 20
Kelvin	: 3000-4000
CRI	: >80
Led Lifetime	: 50 000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
EAG1	12	Area 3" Downlight Gear 1	1460	Q105-91-Q62

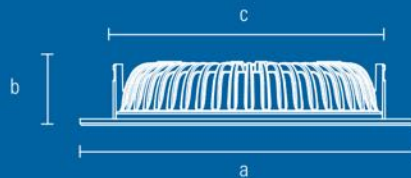

Quality Certificate



www.edealight.com

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

LUNA 4"

Downlight Luminaire »

LIGHTING SOLUTIONS



Suitable for recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.





The Luminaire will be accurate and realistic solution for you.

Technical Features

Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: COB LED
Housing	: Aluminium
Optics	: Reflector
IP	: 20
Kelvin	: 3000-4000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
DRSG1	15	Luna 4" Downlight Gear 1	1942	Q146-125-Q70

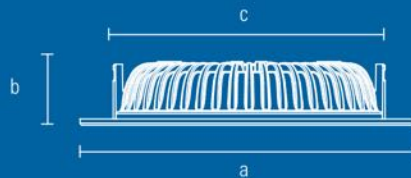

Quality Certificate



www.edealight.com

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office
Maslak Mah. AOS 55. Sk. 42 Maslak B Blok
No:4 İç Kapı No:703 Sarıyer / İstanbul / Turkey
E-mail: info@edealight.com

Factory
Omerli Mh. Özcinar Sk. Kos-Koop San. Sitesi
No.18 Hadımköy-Arnavutköy/ İstanbul / Turkey

Copyright © 2025 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.